


WW-H4 HARDWIRED WARNING WATCHDOG WITH VOLTAGE MONITORING RELAY AND PRESSURE SWITCH


WW-LP LOGIC PANEL



CAUTION!
DISCONNECT POWER
TO CONDENSING UNIT
BEFORE BEGINNING
INSTALLATION

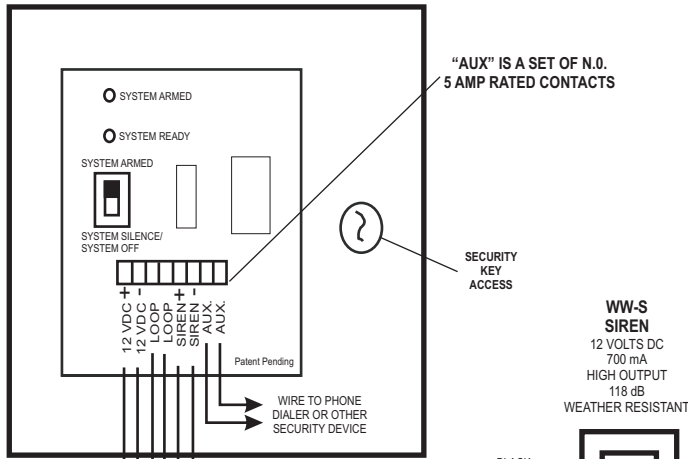

**WW-S
SIREN**
12 VOLTS DC
700 mA
HIGH OUTPUT
118 dB
WEATHER RESISTANT



MOUNT SIREN ON
OUTSIDE WALL AS
HIGH AS POSSIBLE IN
A LOCATION WHERE
WIRES CAN BE PULLED
THROUGH THE WALL
DIRECTLY BEHIND SIREN

**Refer to WW-H Installation
Instruction Sheet**

ALL WIRING IS
STANDARD 18 GAUGE
THERMOSTAT WIRE

CONTROL WIRING

